Allen 53LT Series Model 53LTi

High Performance, Low Cost Thermal Transfer Printer

High performance, low cost thermal transfer printer. Versatile enough for printing fixed and variable data, text and graphics. Ideal for reproducing bar codes, real time, sell-by dates, batch numbers, prices, source codes and much more.





- Best-in-class thermal print head
- Large print area with print speeds of up to 250mm per second
- · Easy load ribbon cassette
- Single connection point
- Large 600 metre ribbon capacity
- Printer resident barcodes
- 300 dpi resolution

Key Features

Key Functions

- Full clock and calendar functions
- Print fixed and variable data
- Print text, graphics, RSS barcodes, linear and composite barcodes both horizontally and vertically

• Mark labels and substrates for packed products with expiration dates, product identification information, lot/batch numbers, company logo's and more

The rugged 53LT is a space-saving, two component model. This compact printer can be easily integrated with a wide range of host equipment such as vertical and horizontal form-fill-seal systems, primary labellers, thermo formers and overwrapping equipment



53LT Series

Specifications	Model 53LTi
Dimensions:	Print Engine
Height Width Depth Weight	205mm, 8.08" 160mm, 6.30" 202mm, 7.95" 7kg, 15 lbs
Electrical Standard	110/220/240 V 50/60 Hz 250 Watts CE Certified
Air Supply	30 – 80 psi
Print Area Length Width	30mm 53mm
Printhead Resolution	12 dots/mm (300 dpi) horizontally and vertically
Print Speed	Up to 250mm per second
Ribbon	Cassette holds up to 600 metre (1970') roll
Memory	200 kb standard
Outputs	Machine on error (failsafe) – image ready, Cassette open, power on, etc. Head up/down Inhibit (printing or ready to print.)
Inputs	Print signal input
Functions	Normal and obligatory text Date/Real time clock Graphics images – BMP format 0, 90, 180, 270 rotation Extended date codes
Communications	Rs232 (PC)

General Dimensions All dimensions are in millimetres

Text

Four (4) resident fonts = (scaleable in width)

Bar Codes

RSS14, RSS14 truncated, RSS14 limited, RSS14 stacked, RSS14 stacked omni-directional, EAN-8, EAN-13, EAN-128, CODE 128, CODE 39, 1-2 of 5, Code 93, DUN 14, ISBN, UPC-A


Communications

RS-232 (PC)

Multi-language (8) support standard

Options

Remote image loading with memory card

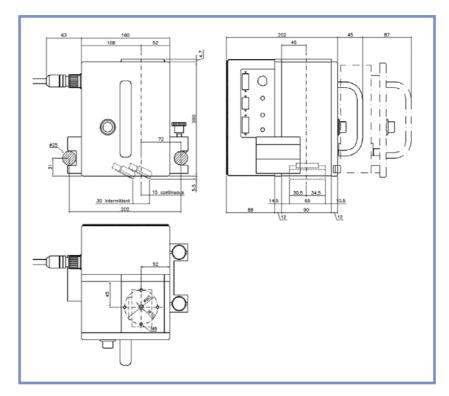

©2008 Allen Coding Systems. Our policy is one of constant improvement, illustrations and specifications cannot be held binding in detail. All rights reserved. Specifications, terms and pricing are subject to change. Please consult your local sales representatives for details.

www.eticosrl.it







